


# CHC 8.8 zingué

DIN 912 - ISO 4762

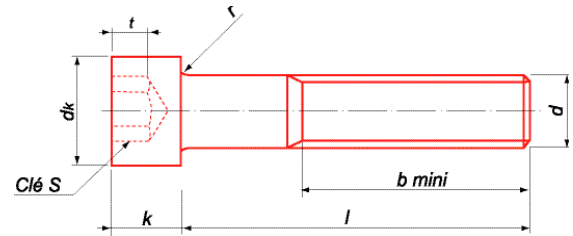

∅	3	4	5	6	8	10	12	14	16
P	0,5	0,7	0,8	1	1,25	1,50	1,75	2	2
Dk	5,5	7	8,5	10	13	16	18	21	24
K	3	4	5	6	8	10	12	14	16
s	2,5	3	4	5	6	8	10	12	14
t	1,3	2	2,5	3	4	5	6	7	8
b	18	20	22	24	28	32	36	40	44
*	20	25	25	30	35	40	50	55	60

\* Filetée sous tête jusqu'à

∅	3	4	5	6	8	10	12	14	16	
Longueur sous-tête	Boîte de 200						Boîte de 100	Boîte de 50		
6	X	X	X							
8	X	X	X	X						
10	X	X	X	X	X					
12	X	X	X	X	X					
16	X	X	X	X	X	X				
20	X	X	X	X	X	X	X			
25	X	X	X	X	X	X	X			
30	X	X	X	X	X	X	X	X	X	
35		X	X	X	X	X	X	X	X	
40		X	X	X	X	X	X	X	X	
45		X	X	X	X	X	X	X	X	
50		X	X	X	X	X	X	X	X	
55			X	X	X	X	X	X	X	
60			X	X	X	X	X	X	X	
65			X	X	X	X	X	X	X	
70			X	X	X	X	X	X	X	
80			X	X	X	X	X	X	X	
90			X	X	X	X	X	X	X	
100				X	X	X	X	X	X	
110				X	X	X	X	X	X	
120					X	X	X	X	X	
	Boîte de 50							Boîte de 25		

Les caractéristiques mécaniques sont conformes à la norme ISO 898-1.