


coupleurs standards



série 120 - profil ISO 6150 B-12 US-MIL

passage 5,5 mm

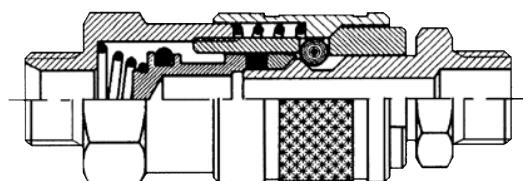


Débit :
1100 l/min

Pression :
1 - 16 BAR



121


implantation mâle cylindrique



CODE	A	B	D	L	CH
121 644	1/4	8	24	53	21
121 633	3/8	9	24	54	21
121 622	1/2	10	24	55	24

122


implantation femelle cylindrique



CODE	A	B	D	L	CH
122 644	1/4	11	24	55	21
122 633	3/8	11,5	24	55,5	21
122 622	1/2	14	24	59	24

125



équipé d'une douille cannelée



CODE	A	D	L	CH
125 606	6	24	64	21
125 608	8	24	64	21
125 610	10	24	64	21
125 612	12	24	64	21

321



distributeur à 2 voies, implantation mâle conique



CODE	A	H	L	CH	CH1
321 644	1/4	69	99	17	21
321 633	3/8	72	100,5	20	21
321 622	1/2	82	110	25	26



322

distributeur à 2 voies, implantation femelle cylindrique




CODE	A	H	L	CH	CH1
322 644	1/4	64	98	17	21
322 633	3/8	67	99,5	20	21
322 622	1/2	73	109	25	26



embouts en laiton nickelé - profil US-MIL

221
embout mâle cylindrique


CODE	A	B	L	CH
221 644	1/4	8	36,5	17
221 633	3/8	9	37,5	19
221 622	1/2	10	39	24



222
embout femelle cylindrique


CODE	A	B	L	CH
222 644	1/4	11	36,5	17
222 633	3/8	11,5	37	19
222 622	1/2	14	40	24
embout de sécurité avec purge lente				
228 644	1/4	11	44	17


225
embout avec douille cannelée


CODE	A	D	L
225 606	6	12	43,5
225 608	8	12	43,5
225 610	10	14	46
225 612	12	16	46



embouts en acier zingué - profil US-MIL

AT 0239
embout mâle conique


CODE	A	B	L	CH
AT 023 901	1/4	9	38	14
AT 023 902	3/8	11	41	17

AT 0239
embout femelle cylindrique


CODE	A	B	L	CH
AT 023 904	1/4	12	38	17
AT 023 905	3/8	12	41	19

AT 0240
embout pour tuyau souple


CODE	A	D	L
AT 024 001	6	12	48
AT 024 002	8	12	48
AT 024 003	10	12	48